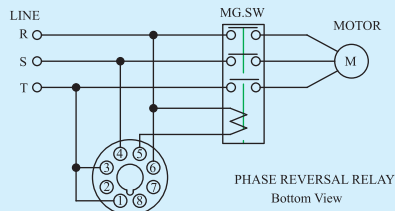
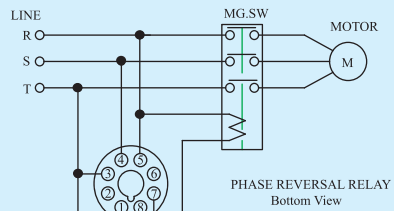



PROTECTIVE RELAY 保護繼電器

SPECIFICATION 規格		APR-3	APR-4
Model 型號			
Dimension(mm) 尺寸		50H*40W*57.5D	
Functions 功能特性		> Protecting three-phase induction motor reverse relay 220V source with surge absorber and high voltage protecting. > 防止三相感應馬達逆相運轉220V內加突波吸收器防止過高電壓，可有效保護負載。 > With 3 phases voltage detecting to protect motor reversal relay. > Assure the sequence of 3 phases power source, to protect motor rev. > The output relay is energized when the phase sequence is correct and is deenergized when the phase sequence is wrong or one phase is lost. > 可確認三相電源之相序，防止馬達逆轉 > 按圖面接線，在缺相時可防止電磁接觸器動作 > 本保護繼電器，採用電壓檢出方式與負載電流無關 工作電壓為額定電壓95%~110%	
Rated Voltage 額定電壓		AC(V): 220, 240, 380, 415, 440 50/60Hz	
Contact Rating 接點容量		250VAC 5A Resistive Load 48VDC 5A 電阻性負載	
Reset Time 複歸時間		-----	
Consumed Power 消耗功率		2VA	
Ambient Temperature 使用周圍溫度		-10℃~+55℃	
Ambient Humidity 使用周圍濕度		45~85%RH	
Life 壽命	Mechanical 機械	5×10 ⁶ times	
	Electrical 電氣	10 ⁵ times	
Weight 重量		90g	
Connection 接線圖		APR-3 輸出接點:1C  APR-4 輸出接點:1C 	
Timing Chart 時序圖		APR-3 輸出接點:1C  APR-4 輸出接點:1C 